


- Note:
- (1). Modulating Board
Input Signal: 4~20mA, 1~5V, 2~10V.
(it is suggested to use the shielding wire and its length should not exceed 30m).
Output Signal: 4~20mA, 2~10V.
 - (2). Using less than 3A current for "A,B,C,D,E,F".

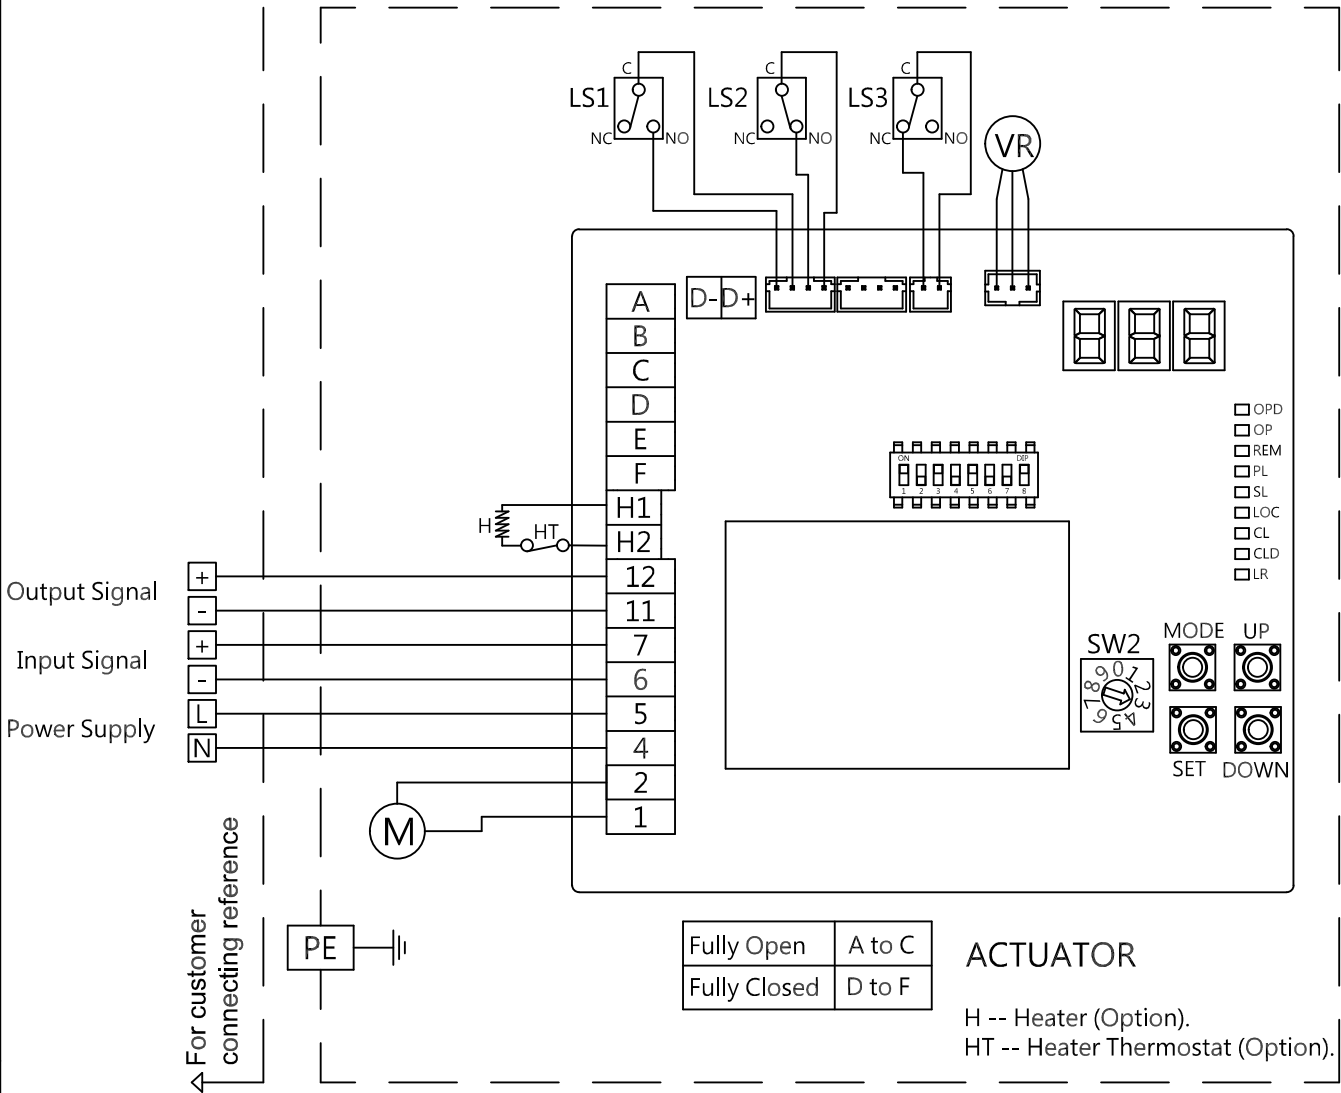

Wiring Diagram NO: 03-005-18-02-03-03-3-001			
Rev	1.0	Signature	Date
Designed			
Drawn	Wen Yao	2018/08/02	
Checked	Ming Hung	2018/08/18	
Approved			
L250 - L500 Power Supply : 220~240VAC 1-Phase Modulating Control 75% Duty Cycle			